Vol-06 Issue 06, June -2022 ISSN: 2456-9348
Impact Factor: 5.004

iJETRM
International Journal of Engineering Technology Research & Management

ROLE OF ENVIRONMENTAL FRIENDLY MACHINING: IN PROSPECT TO SUSTAINABLE MANUFACTURING

Rajeev Sharma[1*], Binit Kumar Jha[2], Vipin Pahuja[3]
[1,2,3]School of Manufacturing Skills, Bhartiya Skill Development University, Jaipur 302037, India
Corresponding Author*- Rajeev Sharma

Abstract
To compete in today's market, any manufacturing industry must strike a balance between environmental, social, and economic factors. Environmentally friendly machining is a new approach that is both cost-effective and environmentally friendly while also improving machinability. The main focus of this essay is on gaining a better grasp of environmentally friendly machining and studying diverse insights from previous literature that can help with its implementation. Some of the categories used to categorise the articles include dry machining, MQL machining, cryogenic machining, and environmentally friendly machining dimensions. Following a research of the literature, it was determined that heat is generated in the cutting zone as a result of tool chip contact in metal cutting operations, resulting in poor surface smoothness and increased tool wear. Surface roughness and tool wear are two characteristics that play a big impact in quality in every manufacturing industry. The review paper's main goals are to investigate and promote environmentally friendly manufacturing. Finally, it was discovered that environmentally friendly machining is both cost-effective and ecologically benign when compared to traditional machining.

Keywords: Surface engineering, Mist-cooling, Sustainable manufacturing, Ti-Alloy, Stainless Steel.

1 Environmental Friendly Machining

1.1 Introduction

Machining is that the most vital producing cycle, involving the transformation of raw materials into the ultimate desired object via a reductive cycle and connection live. The reductive cycle of materials is employed to point machining measures for the foremost half. Because friction is formed between the tool, the work piece, and the equipment chip during machining, a portion of the energy supplied is converted to heat. Figure 1 depicts the heat generated during a metal cutting operation.

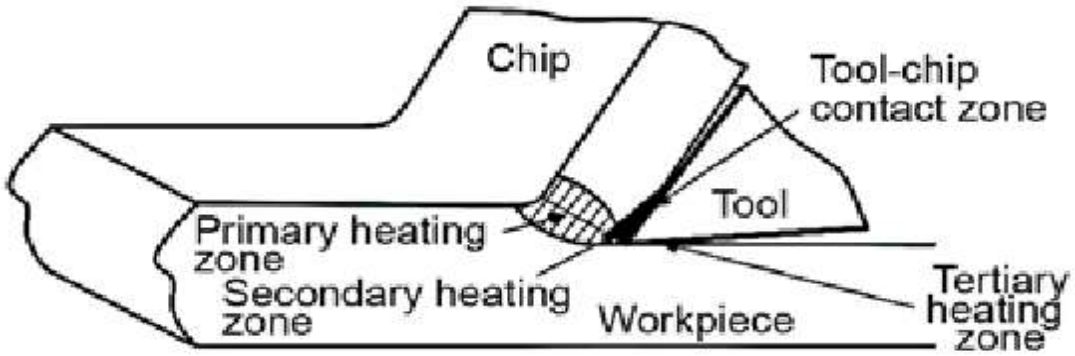

Figure 1: *shown metal cutting process [1]*

If the heat generated is not adequately dissipated, it can affect the finished surface quality, tool life, and overall interaction. Furthermore, these cycles are not environmentally friendly. In the metal cutting cycle, the standard cooling approach is used, which is neither cost-effective nor environmentally friendly [2]. Using normal cutting fluids in metal cutting processes is inflicting increasing environmental and health difficulties, thus environmentally friendly machining techniques are created, that is a cheap and sensible various. These approaches additionally improve surface quality, take away settled edges, lower friction forces, and extend tool life. property machining is appreciating environmental friendliness. The layout of property machining is shown in Figure 2.

iJETRM
International Journal of Engineering Technology Research & Management

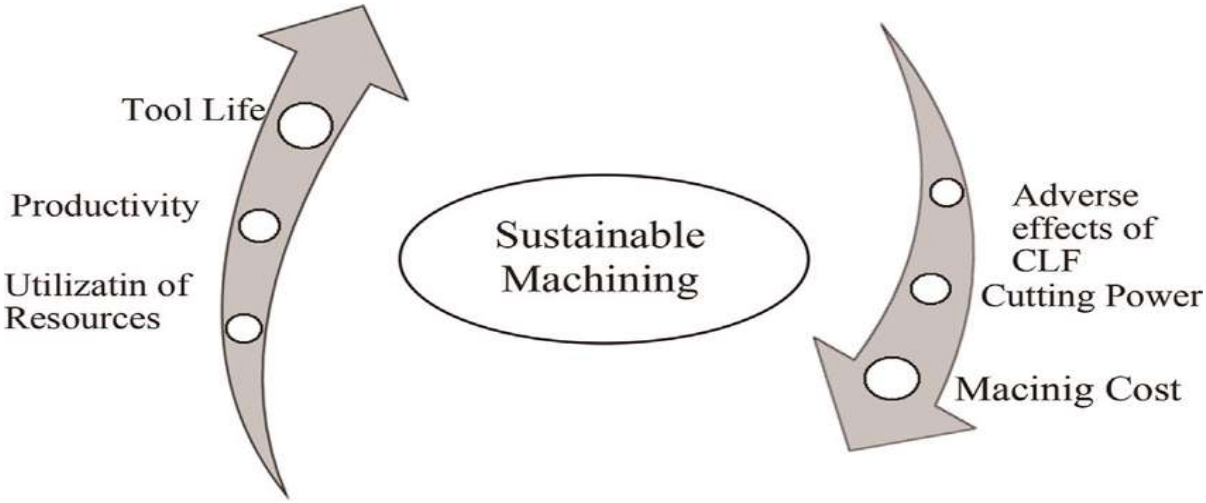

Figure 2: *Showing advantages of environmental friendly machining [3]*

1.1.1 Environmental Friendly Machining Vs Sustainable Machining Process

Manageability terms refer to products and ventures, laws, rules, and arrangements that cause minimal, negligible, or no harm to biological systems or the climate. Environmentally friendly cycles, also known as ecological amicable cycles, are also referred to as eco-friendly, nature-friendly, and green.

Types of Cutting Fluids

Different types of cutting fluids square measure used in industries. Figure 3 showing classifications of cutting fluids.

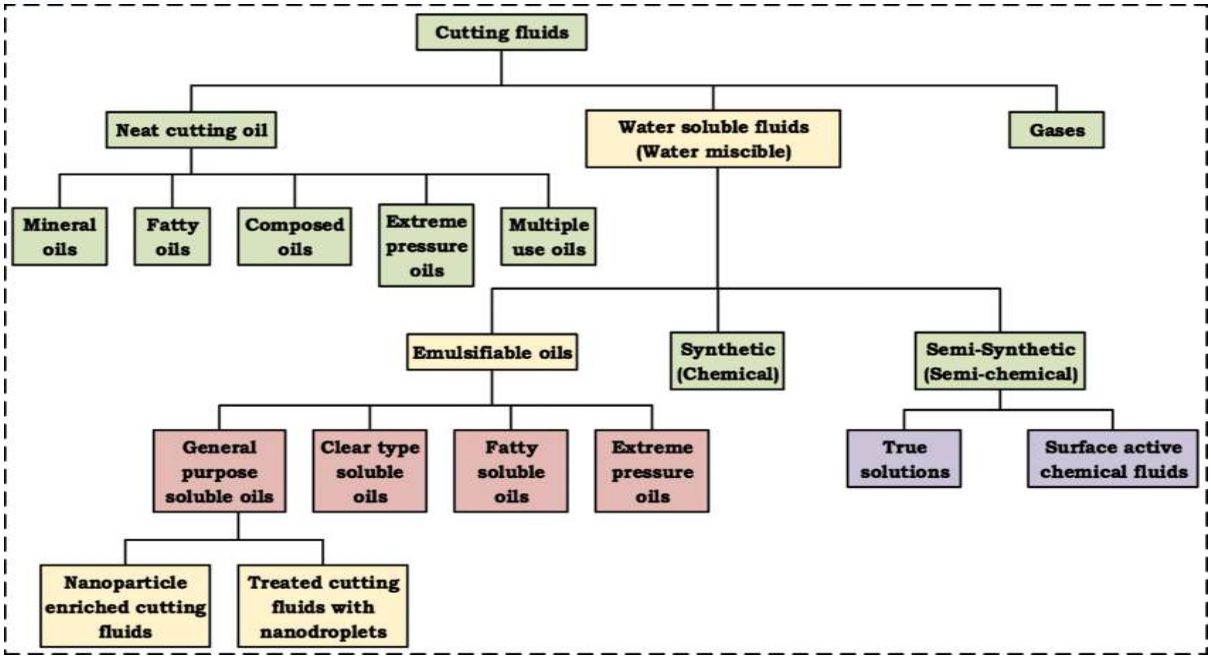

Figure: 3 *Showing types of cutting fluids [4],[5]*

2. Literature Review

This section is a review of the literature on the impact of environmentally friendly machining techniques on the machinability of materials such as titanium alloys, stainless steels, magnesium alloys, aluminum alloys, and Inconel. Based on the materials, this part was separated into four sub-sections. The sections that follow are:

2.1 Literature Review on Ti and its alloy

Titanium alloy offers excellent qualities such as strength retention and corrosion resistance at high temperatures, which make it ideal for use in biomedical, aerospace, petroleum, and automotive applications [6]. Titanium and its blends are delicate to cut accoutrements in comparison to aluminum, carbon, and hardened sword. To

iJETRM
International Journal of Engineering Technology Research & Management

ameliorate the machinability of delicate- to- cut accoutrements, cryogenic, MQL, and high- pressure machining is used. As a result, these cooling ways are allowed to be a feasible result for machining a variety of delicate- to-cut accoutrements [7]. In terms of face enhancement, [8] observed that when Ti- 6Al- 7Nb was exposed to dry, flood tide, and cryogenic surroundings, face roughness (Ra) bettered by 35 percent, and by6.6 percent when exposed to cryogenic cooling. Figure 4 depicts the microstructure of the workpiece. This is also corroborated by [9], which demonstrated that cryogenic contraction cooling enhanced face roughness and machinability after trials on Ti- 6Al- 4V with oil painting- grounded coolant. likewise, tool wear and tear [10] trial work was carried out on Ti- 6Al- 4V using dry, cryogenic compressed air and set up that tool wear and tear was reduced as compared to dry machining.

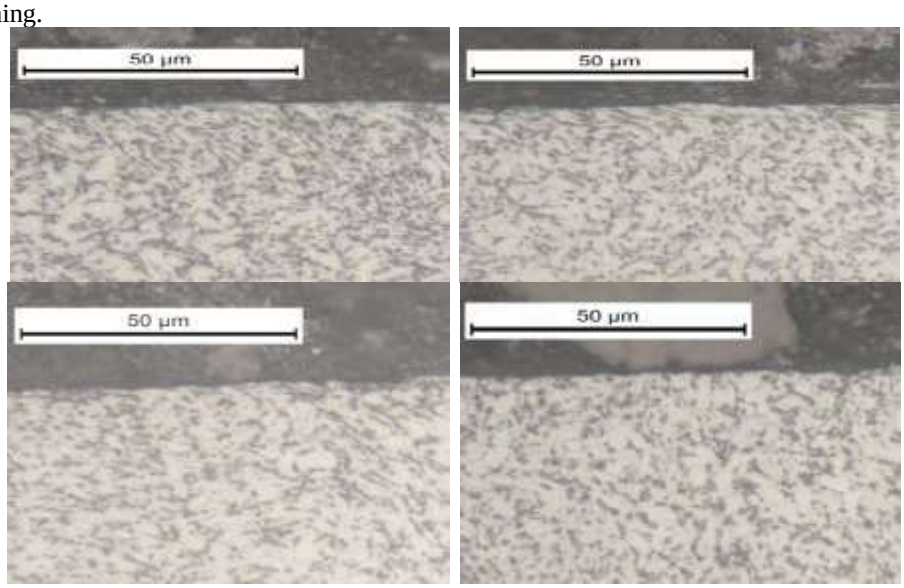

Figure 4: *The microstructures of the machined surface and sub-surface in: (a) cryogenic machining; (b) flood-cooled machining; (c) dry machining; and (d) as received material [7]*

Similarly, environmentally friendly machining offers superior machinability than other methods. [11] describes a trial on Ti- 6Al- 4V with flood tide, ScCO2, and MQL ScCO2. Following this exploration, it was discovered that using ScCO2 MQL at Vc- 60 m/ min and a feed rate of0.5 mm/ tooth bettered machinability. In terms of tool life [12], machining work on Ti- 6Al- 4V with AlCrN tool coating was fulfilled under colorful cooling surroundings, including flood tide, MQL Nano patches, internal cryogenic cooling, MQL external cooling system, and MQL internal cryogenic cooling. In comparison to the traditional flood tide coolant strategy, MQL circular cryogenic cooling system tool wear bettered by 90. MQL circular cryogenic machining setup and tool wear and tear in colorful machining settings are shown in Figure 5(a & b).

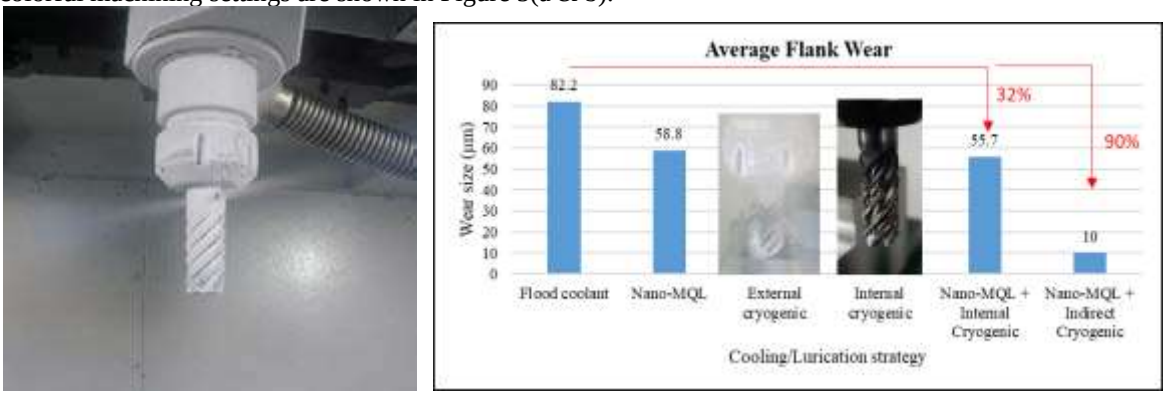

Figure: 5 (a) MQL + indirect machining setup, (b) Tool wear with respect to different cooling system [12]

Figure 5 shows that tool wear and tear is reduced as compared to the flood tide cooling system. As a result, it has been discovered that environmentally friendly machining produces better results. The literature review on titanium amalgamation is included in References 9- 19. These studies are presented in irregular form, with Table 1 displaying a literature review of machining on Ti and its blends under colorful cooling surroundings.

iJETRM
International Journal of Engineering Technology Research & Management

Table 1 *Literature Review of Ti-alloy*

Paper Title	Cutting Tools	W/P	Environment
[7]	TiAlN Coated inserts	Ti-6Al-7Nb	Dry, flood and Cryogenic machining
[8]	Coated carbide insert CNMG 120,412	Ti-6Al-4V	Oil based coolant, Cryogenic cooling system
[9]	Carbide inserts CNMX120408A2S	Ti-6Al-4V	Dry machining, Machining with compressed air
[10]	SANDVIK 419 R-1405E-MMS407	Ti-6Al-4V	Flood machining, ScCO2 and MQL+ScCO2
[11]	Coated with AlCrN	Ti-6Al-4V	Flood, MQL+ Nano particles, internal cryogenic cooling, MQL+ Internal, MQL+ indirect
[12]	Uncoated carbide inserts CNMG120408	Ti-6Al-4V	UT, CT(12H, 24H, 36H)
[13]	SANDVIK432MM insert with TiCN coating	Ti-5553	Flood machining, MQL, Cryogenic cooling system
[14]	Cemented carbide CNMG120404	Ti-10V-2Fe-3Al	Cryogenic with CO2, emulsion
[15]	Uncoated cemented carbide insert	Ti-6Al-4V	Dry machining, wet with MQL, MQL with 0,-15,-30,-45 degree
[16]	Uncoated microcrystalline ISO K20 insert	Ti-6Al-4V	High pressure cooling approach, conventional cooling approach
[17]	PVD coated tungsten carbide insert	Ti-6Al-4V	Untreated condition, treated condition (24H,48H)
[18]	Cemented carbide with diamond coated insert	Ti-6Al-4V	Dry, ScCO2, ScCO2+WMQL, ScCO2+ O_oWMQL
[19]	Uncoated carbide insert	Ti-6Al-4V, Inconel 718	Cryogenic cooling (CO2), MQL, CMQL

2.2 Literature Review on Stainless steel

Stainless sword [20- 22] is an element of iron- grounded blends having at least 11 percent chromium [23- 25], which prevents rusting and provides heat resistance [23, 24, 27- 30]. The pristine- sword composition is shown in Table 2. Stainless sword contains carbon (ranging from0.03 percent to further than1.00 percent), nitrogen, aluminum, silicon, Sulphur, titanium, nickel, and molybdenum, among other rudiments. Exact kinds of tempered sword are generally assigned a three- number number, similar as 304 good.

iJETRM
International Journal of Engineering Technology Research & Management

Stainless sword's resistance to ferric oxide conformation is due to the presence of chromium in the complex, which forms a unresisting sub caste that protects the introductory material from corrosion and allows it to tone- form in the presence of oxygen. Stainless sword is generally used in machining measures in this way.

Table 2 *Element of Stainless steel*

Material	%
C	0.008
S	0.030
Cr	20
Ni	12
Mg	2.00
P	0.045
Si	0.75
N	0.10
Fe	67-71

In terms of surface roughness [31], experiments were conducted on AISI 4340 steel using a liquid nitrogen chilling method, and the error was found to be just 5.32 percent. Figure 11 shows the percentage contribution of surface roughness control variables. also, all tool life trials [32] were conducted on AISI p20 in dry, flood tide, and cryogenic cooling surroundings. After the trial, it was discovered that machining with cryogenic cooling reduced tool wear and tear by 15- 17 percent when compared to indispensable cooling surroundings.

In terms of face integrity (33- 36), all of the trials were carried out on colorful types of pristine sword under flood tide, dry, and MQL machining, as well as cryogenic machining, and it was discovered that environmentally friendly machining provides better machining performance than conventional cooling ways. Table 3 summarizes the results of the literature review on pristine sword.

Table 3 *Literature Review on Stainless Steel*

Paper Title	Cutting Tools	W/P	Environment
[31]	HSS T-42 S-400 Insert	AISI 4340	LN2
[32]	TiN coated ISO-P30TN450XPDT	AISI p20	Dry machining, flood machining, machining with LN2
[33]	PVD coated Nano-Multilayer TiAlN insert	Duplex stainless steel	Dry environment and machining with cryogenic (LN2)
[34]	CBN TCGW16T304S105MT	AISI52100	Cryogenic (LN) and dry machining
[35]	CVD coated ($TiCN/Al_2O_3$) carbide insert	AISI 4340	Dry environment machining, cryogenic machining(LN2)
[36]	TiN coated carbide DNMG150608 MM	AISI304	Dry machining, machining with liquid nitrogen, MQL machining, MQL+LN2, MQL+ CO2 (Cryo.)
[37]	AlTiN PVD coated KC 5010 tungsten carbide insert	17-4 HSS	Dry machining, wet machining, MQL machining, machining with liquid nitrogen
[38]	HSS twist drill	SS310	Untreated condition, cryogenic treated condition

iJETRM
International Journal of Engineering Technology Research & Management

[39]	TiN & TiAlN coated insert	AISI D2	Dry machining, wet machining and LN2 machining
[40]	TiCN/Al_2O_3/TiN coated tungsten carbide insert	AISI H11	Dry machining, Liquid nitrogen cooling untreated condition
[41]	Uncoated SNGA 120408 TO1020AB30	AISI D2	CHT, DCH (36) & DCTT (36)

2.3 Literature Review on Magnesium alloy, nickel alloy, Inconel and aluminum alloy

Table 4 showing literature review on Magnesium alloy, nickel alloy, Inconel alloy and aluminum alloy.

Table 4 *Literature review on Magnesium alloy, nickel alloy, Inconel alloy and aluminum alloy*

Paper Title	Cutting Tools	W/P	Environment
[42]	Carbide insert	AA6063 aluminum alloy	Machining with dry & machining with LN2
[43]	Carbide insert CNMG	Inconel 718	Dry machining, LN2 machining, MQL machining and MQL+LN2 machining
[44]	Two flute helical PVD	AZ31 magnesium alloy	Dry machining, liquid nitrogen machining
[45]	PVD TiAl/AlCrN grade ACK 300	Inconel 718	Cryogenic cooling system and dry machining
[46]	PVD TiAlN/TiN coated carbide tool	Nickel based alloy	Cryogenic machining, MQL machining and MQL + Cryogenic machining
[47]	Uncoated carbide tool	AZ31B magnesium alloy	Dry machining & machining with LN2
[48]	AlTiN coated tungsten insert	Nickel based alloy	Machining with liquid nitrogen & machining with MQL + Nano particles
[49]	Coated carbide tool	Inconel 625	Dry machining, MQL machining, Cryogenic machining (by LN2), MQL machining + LN2 machining, NMQL + LN2
[50]	PVD coated tool	Inconel 718	Machining with dry and cryogenic machining (Through CO2)

3. Summary of Literature Review

This section summarizes all literature reviews based on two criteria: quantity of papers per kind of material and comparative investigation of machining performance and environmental issues under various cooling-lubrication settings.

iJETRM
International Journal of Engineering Technology Research & Management

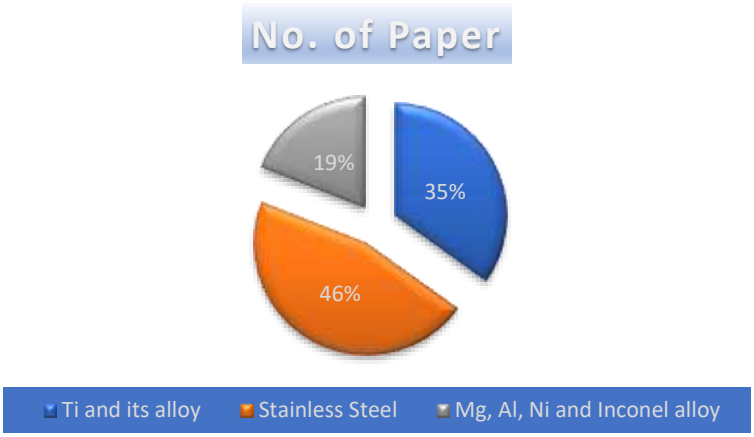

Figure. 6: *literature review between No. of paper to types of materials*

Comparative analysis of machining performance and environmental issues under various cooling-lubrication circumstances. These analyses are shown in Table 5.

Table 5 *Comparative analysis for performance and ecological aspects of machining under different cooling-lubrication conditions*

Parameters	Dry Machining	MQL Machining	Cryogenic Machining
Tool Life	2	4	5
Surface Quality	2	4	5
Cost	3	5	4
Sustainability	3	4	5

4. Conclusion

The current study emphasized how environmental friendly machining exploration has progressed in the former ten times by conducting a comprehensive descriptive study through a methodical literature review of chosen papers. The conclusions of composition are following;

- In utmost machining operations, standard slice fluids are used. still, these approaches aren't ideal for machining operations due to environmental and health enterprises. Because these styles are neither cost-effective nor environmentally salutary [51]. Following a review of the literature, it was discovered that environmentally friendly machining styles similar as dry machining, high- pressure cooling, MQL machining, and cryogenic machining are both environmentally and bring-effective.
- Dry machining is less harmful to the environment and enhances machinability [52]. However, there are significant limitations to dry machining in the drilling machining process because drilling generates greater heat in the cutting zone, reducing machining performance.

The current essay is a comprehensive examination of environmentally friendly machining and its impact on industrial industries.

Reference

[1] Introduction to metal cutting; Engineering tutorial.
[2] L.D. Lacalle, Experimental and numerical investigation of the effect of spray cutting fluids in high speed milling, J. Mater. Process. Technol. 172 (11). 11–15.
[3] Sharma, R., Jha, B.K., & Pahuja, V. (2021). " Role of Sustainable Techniques In Manufacturing Process: A Review". International Journal of Engineering Technologies and Management Research, 8(2), 41-45. https://doi.org/10.29121/ijetmr.v8.i2.2021.869.

iJETRM
International Journal of Engineering Technology Research & Management

[4] Fratila D. (2013) "Sustainable Manufacturing Through Environmentally-Friendly Machining". In: Davim J. (eds) Green Manufacturing Processes and Systems. Materials Forming, Machining and Tribology. Springer, Berlin, Heidelberg. https://doi.org/10.1007/978-3-642-33792-5_1.
[5] R. Sharma, B. K. Jha, V. Pahuja, and S. Sharma, "Role of environmental friendly machining on machinability," Materials Today: Proceedings, vol. 50, pp. 640–648, 2022, doi: 10.1016/j.matpr.2021.03.652.
[6] R. Sharma, B. K. Jha, and V. Pahuja, "A Critical Review on Machining of Titanium and Its Alloy under Cryogenic Cooling Environment," in IOP Conference Series: Materials Science and Engineering, Dec. 2020, vol. 998, no. 1. doi: 10.1088/1757-899X/998/1/012013.
[7] Murat Sarıkaya, Munish Gupta, Italo Tomaz et.al. "Cooling techniques to improve the machinability and sustainability of light-weight alloys: A state-of-the-art review". Journal of Manufacturing Processes 62:179-201. DOI: 10.1016/j.jmapro.2020.12.013.
[8] Y. Sun, D.A. Puleo, J. Schoop, I.S. Jawahir, Improved surface integrity from cryogenic machining of Ti- 6Al-7Nb alloy for biomedical application, Procedia CIRP 45 (2016) 63–66.
[9] Ampara Aramcharoen, Influence of cryogenic cooling on tool wear and chip formation in turning of titanium alloy, Procedia CIRP 46 (2016) 83–86, https:// doi.org/10.1016/j.procir.2016.03.184.
[10]Shoujin Sun, Milan Brandt, Suresh Palanisamy, Matthew S. Dargusch, Effect of cryogenic compressed air on the evolution of cutting force and tool wear during machining of Ti–6Al–4V alloy, J. Mater. Process. Technol. 221 (2015) 243–254, https://doi.org/10.1016/j.jmatprotec.2015.02.017.
[11]K.K. Wika, O. Gurdal, P. Litwa, C. HitchensC.,, Influence of supercritical CO2 cooling on tool wear and cutting force in the milling of Ti-6Al-4V, Procedia CIRP 82 (2019) 89–94.
[12]K. Hee, G. Dong, M.A. Suhaimi, D.Y. Lee, T.G. Kim, D.W. Kim, S.W. Lee, The effect of cryogenic cooling and minimum quantity lubrication on end milling of titanium alloy Ti-6Al-4V, J. Mech. Sci. Technol. 29 (2015) 5121–5126.
[13] U. Kumar, P. Senthil, A comparative machinability study on titanium alloy Ti- 6Al-4V during dry turning bt cryogenic treated and untreated condition of uncoated WC inserts, Mater. Today Proc. (2019) 2214–7853.
[14]Y. Sum, B. Huang, D.A. Puleo, I.S. Jawahir, Enhanced machinability of Ti-5553 alloy from cryogenic machining: Comparison with MQL and flood cooled machining and modeling, Procedia CIRP 31 (2015) 477–482.
[15]C. Machai, D. Biermann, Machining of Bita- titanium-alloy Ti-10V-2Fe-3Al under cryogenic conditions: Cooling with CO2, J. Mater. Process. Technol. 211 (2011) 1175–1183.
[16]S.M. Yuan, L.T. Yan, W.D. Liu, Q. Liu, Effect of cooling air temperature on cryogenic machining of Ti-6Al-4V alloy, J. Mater. Process. Technol. 211 (2011) 356–362.
[17]A.K. Nandy, M.C. Gowrishankar, S. Paul, Some studies on high-pressure cooling in turning of Ti–6Al–4V, Int. J. Mach. Tools Manuf. 49 (2) (2009) 182–198, https://doi.org/10.1016/j.ijmachtools.2008.08.008.
[18]V. Sivalingam, J. Sun, B. Yang, K. Liu, R. Raju, Machining performed and tool wear analysis on cryogenic treated inserts during end milling of Ti-6Al-4V alloy, J. Manuf. Processes 36 (2018) 188–196.
[19]T. Kivak, S. Murat, S. Senol. (2019). Evaluation of tool wear, surface roughness/topography and chip morphology when machining of Ni-based alloy 625 under MQL, cryogenic cooling and Cryo MQL. J. material, Research Technology . 2 0 2 0;9(2):2079–2092.
[20]Q. An, C. Cai, F. Zou, X. Liang, M. Chen, Tool wear and machined surface characteristics in side milling Ti6Al4V under dry and supercritical CO2 with MQL conditions, Tribol. Int. (2020), https://doi.org/10.1016/j.triboint.2020.106511.
[21] Harold M. Cobb, The History of Stainless Steel, ASM International, Materials Park, OH, 2010.
[22]Peckner, Donald; Bernstein, I.M. (1977). Handbook of Stainless Steels. McGraw Hill. ISBN 9780070491472.
[23]P. Lacombe, B. Baroux, G. Beranger. (1990). Les Aciers Inoxydables. Les Editions de Physique. ISBN 2-86883-142-7.
[24] Davis, Joseph R. (ed.) (1994). Stainless Steels. ASM Specialty Handbook. Materials Park, OH: ASM International. ISBN 9780871705037. Retrieved 8 March 2020.
[25] ISSF Staff (8 March 2020). ''The Stainless Steel Family" (PDF). Brussels, Belgium: International Stainless Steel Forum. p. 1, of 5. Retrieved 8 March 2020.
[26] The ISSF whitepaper cited immediately preceding this note states ''a minimum of 10.5% chromium", which is more specific than but consistent with Davis, op. cit.
[27] Rust refers hydrated forms of ferric oxide, that is, to the ''reddish brittle coating formed on iron especially when chemically attacked by moist air", see Merriam-Webster.com, op. cit. [41] ''Rust" and ''Ferric oxide". Merriam-Webster.com Dictionary, Springfield, MA: Merriam-Webster, Accessed 8 March 2020.

iJETRM
International Journal of Engineering Technology Research & Management

[28] ''Definition of RUST". www.merriam-webster.com.
[29]''Corrosion'' Chemical process". Encyclopædia Britannica, Chicago, IL: Encyclopædia Britannica, Accessed 8 March 2020.
[30] Chapter 05: Corrosion Resistance of Stainless Steels https://www.imoa. info/download_files/stainless-steel/issf/educational/ Module_ 05_ Corrosion _Resistance _of_ Stainless _Steels_en.pd
[31] S.K. Khare, S. Agarwal, Optimization of machining parameters in turning of AISI 4340 steel under cryogenic condition using Taguchi technique, Procedia CIRP 63 (2017) 610–614.
[32] S. Ravi, P. Gurusamy, Cryogenic machining of AISI p20 steel under liquid nitrogen cooling, Mater. Today Proc. (2020).
[33] M. Dhananchezian, M.R. Priyan, G. Rajashekar, S.S. Narayanan, Study the effect of cryogenic cooling on machinability characteristics during turning duplex stainless steel 2205, Mater. Today Proc. 5 (2017) 12062–12070.
[34] G.C. Nie, X.M. Zhang, D. Zhang, H. Ding, An experimental study of the white layer formation during cryogenic assisted hard machining of AISI 52100 steel, Procedia CIRP 77 (2018) 223–226.
[35] N.A. Raof, J.A. Ghani, C.H. Che haron (2019). Machining-induced grain refinement of AISI 4340 alloy steel under dry and cryogenic conditions. J. Mater. Res. Technol. 2019;8(5):4347–4353.
[36] O. Pereira, A. Rodriguez, A.I.F. Abia, J. Barreiro, L.N.L. De lacalle, (2016). Cryogenic and Minimum quantity lubrication for an eco- efficiency turning of AISI 304. J. Cleaner Prod.
[37] P. Sivaiah, D. Chakradhar, (2017). Effect of cryogenic coolant on turning performance characteristics during machining of 17-4 PH stainless steel: A comparison with MQL, wet, dry machining. CIRP J. Manuf. Sci. Technol.
[38] R. Periyasamy, V. Gopinath, G. Selvakumar, R.A. Kingsslly, S. Logeshwaran, (2020). Evalution of the effect of cryogenic treatment of HSS drills in drilling SS310. Mater. Today Proc.
[39] S. Ravi, P. Gurusamy, (2020). Experimental investigation on performance of TiN and TiAlN coated tools in cryogenic milling of AISI D2 hardened steel. Mater. Today Proc.
[40] N.A. Ozbek, (2020). Effect of cryogenic treatment types on the performance of coated tungsten tools in the turning of AISI H11 steel. J. Mater. Res. Technol.
[41] F. Kara, M. Karabatak, M. Ayyildiz, E. Nasc, (2019). Effect of machinability, Micro structure and hardness of deep cryogenic treatment in hard turning of AISI D2 steel with ceramic cutting. Jmr&t.
[42] R. Ranjith, C. Somu, G. Tharanitharan, T. Venkatajalapathi, M. Kumar, Integrated Taguchi cum Grey relational experimental analysis (GREAT) for optimization and machining characterization of cryogenic cooled AA6063 aluminum alloys, Mater. Today Proc. 18 (2019) 3597–3605.
[43] F. Pusavec, H. Hamdi, J. Kopac, I.S. Jawahir, Surface integrity in cryogenic machining of nickel based alloy- Inconel 718, J. Mater. Process. Technol. 211 (2011) 773–783.
[44] U. Koklu, H. Coban, Effect of dipped cryogenic approach on thrust force, temperature, tool wear and chip formation in drilling of AZ31 magnesium alloy, J. Mater. Res. Technol. 9 (3) (2020) 2870–2880.
[45] A.H. Musfirah, J.A. Ghani, C.H.C. Haron, Tool wear and surface integrity of inconel 718 in dry and cryogenic coolant at high cutting speed, Wear 376–377 (2017) 125–133.
[46] T. Kivak, S. Murat, S. Senol. (2019). Evaluation of tool wear, surface roughness/topography and chip morphology when machining of Ni-based alloy 625 under MQL, cryogenic cooling and CryoMQL. J. Mater. Res. Technol. 2020; 9(2):2079–2092.
[47] Z. Pu, J.C. Outeiro, A.C. Batista, O.W. Dillon, D.A. Puleo, I.S. Jawhar, Enhanced surface integrity of AZ31B Mg alloy by cryogenic machining towards improved functional performance of machined components, Int. J. Mach. Tools Manuf. 56 (2012) 17–27.
[48] S. Chetan, P.V. Ghosh, P.V. Rao, Comparison between sustainable cryogenic techniques and nano—MQL cooling mode in turning of nickel- based alloy, J. Cleaner Prod. 231 (2019) 1036–1049.
[49] C. Vakkas, Experimental comparison of the performance of nano fluids, cryogenic and hybrid cooling in turning of inconel 625, Tribol. Int. 137 (2019) 366–378.
[50] N.H.A. Halim, C.H.C. Haron, J.A. Ghani, M.F. Azhar, Tool wear and chip morphology in high speed milling of hardened Inconel 718 under dry and cryogenic CO2 conditions, Wear 426–427 (2019) (2019) 1683–1690.
[51] R. Sharma, B. K. Jha, and V. Pahuja, "Impact of environmental friendly machining on machinability: A review," in Materials Today: Proceedings, 2021, vol. 46, pp. 10362–10367. doi: 10.1016/j.matpr.2020.12.498.
[52] S.Rajeev, P.Vipin, J. Binit Kumar, S. Sagar. "Evaluation of Machinability on duplex stainless steel 2205 under dry and Wet condition" Materials Today Proceedings. https://doi.org/10.1016/j.matpr.2022.05.471